

PATENTED

## KEYSTONE® KLX-P1 X-EXTERNAL MOUNT LATCH – ONE-SIDED



SCAN FOR MORE  
INFORMATION

### INSTALLATION

1. The KLX-P1 Gate Latch is designed to fit both right-hand and left-hand applications. To conform to your application the latch assembly may need to be reversed. To reverse the latch assembly, remove the four screws holding the mounting base, carefully lift and rotate the mounting base, and reinstall the four screws (Fig. 1).

**IMPORTANT:** Inner components must not be disturbed while reversing the assemblies.

2. Locate the desired mounting height for the KLX-P1 Gate Latch on the fence post (Fig. 2). Mark the center points of the the (5) mounting holes, and drill appropriate pilot holes for mounting screws. Realign latch and attach to post with the supplied flat head screws.
3. After installing the latch assembly, position and attach the striker. With the gate closed, position the striker with the striker rod within the latch assembly, behind the latch mechanism (Fig. 3). Mark the center-points of the (4) mounting holes, and drill appropriate pilot holes for mounting screws. Realign latch and striker, attach to post with the supplied screws.
4. After installation, TEST the locking and unlocking of the latch. **LOCK:** Turn key clockwise to stop point, then counter-clockwise to the horizontal position and remove. **UNLOCK:** Turn key counter-clockwise to stop point, then turn key clockwise to the horizontal position and remove (Fig. 4).

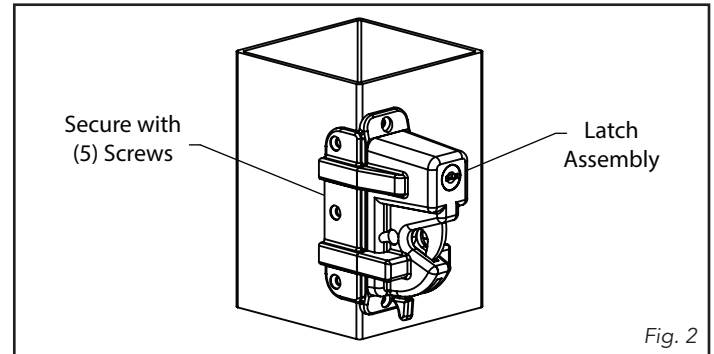


Fig. 2

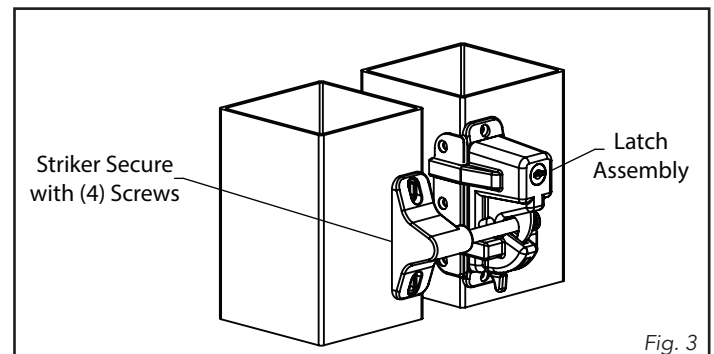


Fig. 3

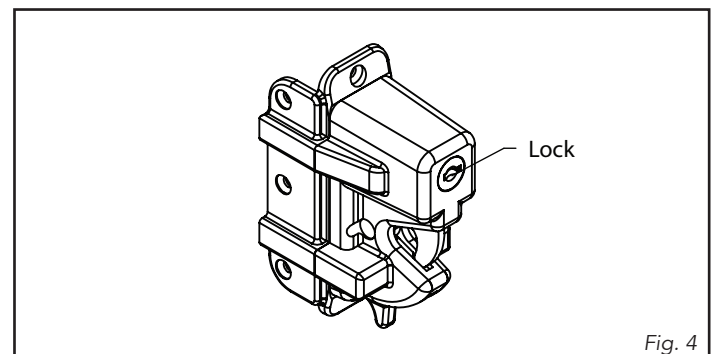


Fig. 4

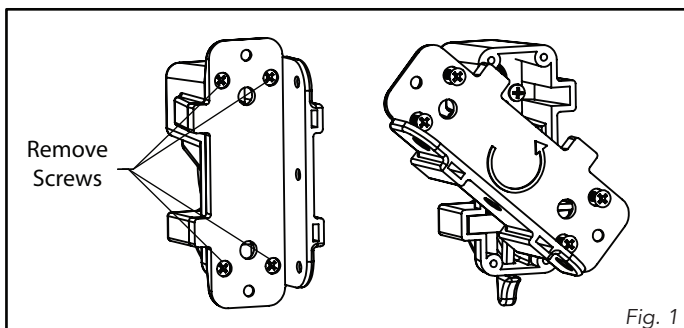


Fig. 1