
8" TRADITIONAL DOUBLE STRAP HINGE


NW38940Q





INSTRUCTIONS

- Mark hinge positions On the gate and the post, mark where the strap leaves and barrel hinge will sit. Typically, one hinge approximately 8" – 12" from top, another approximately 8" – 12" from bottom (Fig. 1).
- 2. Pre-drill mounting holes Use a drill bit slightly smaller than your screws (to avoid wood splitting) (Fig. 2).
- 3. Attach hinge to post (leaf side) Place the strap hinge leaf flat against the gate post. Secure with provided screws or hardware (Fig. 3).
- 4. Mount hinge to gate (strap side) Align the strap barrel over the hinge pin or leaf on the post side. Secure the strap into the gate, ensuring it's flush and aligned (Fig. 4).
- 5. Check alignment & swing Open and close the gate several times to ensure smooth operation without binding. Adjust as needed by loosening screws and shifting slightly.
- 6. Secure all fasteners tightly Once alignment is confirmed, torque or tighten screws fully.

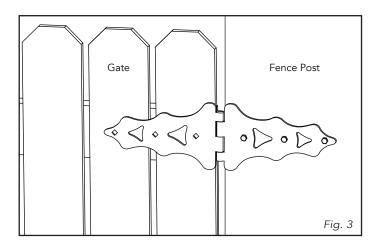

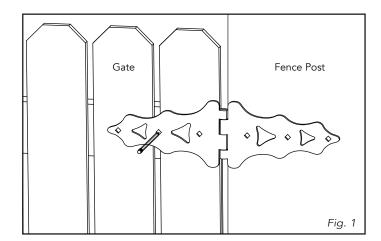

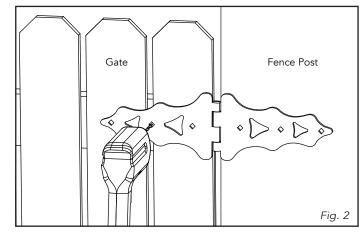

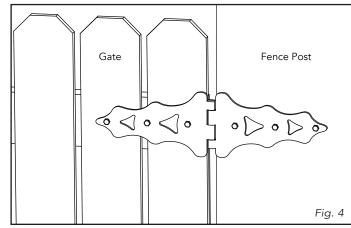

NWI-738400-110425